


## Introducing the better choice . . .



**Belt Drive**

**long version**

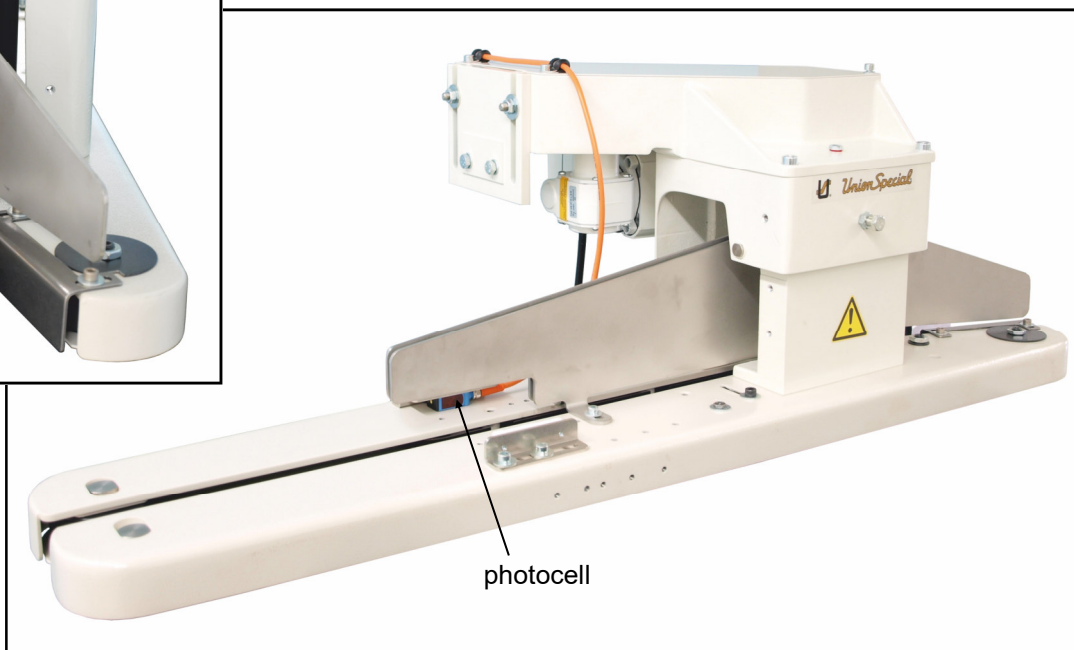

**. . . in bag closing**

## **Bag Feed-in Devices with Belt Drive** for the high speed and high performance bag closing machines Series BC200, BCE300 and 80800

### **BF(S)29900, BFB(S)29900:**

Frequency controlled speed, power supply: 230 V, 1 phase, 50 Hz

#### **Common Specification:**

All external parts are rust protected.

Belt conveyor to protect the bag material.

Degree of protection: IP 55. Insulation class: F.

Painting: RAL 9002, powder coated.

Delivery includes pre-feeler switch 29926A (position switch) to start the sewing machine.

Option: By photocell 29926EOS (see picture)

Other voltages and frequencies on request.

● **STURDY**


● **RELIABLE**

● **EFFICIENT**

Part No.	for Machine Styles	Description
BFB29905A	BC211/BCE311 80800	<b>Bag feed-in device <u>with belt drive</u> (V-type (V), long bag in-feed)</b> The spread paper, HDPE-foil or woven PP bag is fed into the sewing machine. Speed 11-23 m/min. at 50 Hz. Depending on the length and filling height of the bag the seam can be adjusted to a depth of up to 120 mm from top of the bag, standard setting 30-40 mm.
BF29905A	BC211/BCE311 80800	Same as BFB29905A, <b>V-type (V)</b> , but <b>short</b> version.
93051R		<b>Bag-top fold-over device</b> to fold the bag top to the rear. Assembling to the bag feed-in devices BFB29905A and BF29905A required. For all kinds of self-supporting bags. Performance test of bag material recommended.
BFBS29905A	BC211/BCE311 80800	Same as BFB29905A, but <b>paralleler (II)</b> , long bag in-feed.
BFS29905A	BC211/BCE311 80800	Same as BFBS29905A, <b>parallel (II)</b> , but <b>short</b> version.
93051RS		<b>Bag-top fold-over device</b> to fold the bag top to the rear. Assembling to the bag feed-in devices BFBS29905A and BFS29905A required. For all kinds of self-supporting bags. Performance test of bag material recommended.
BF29905ATF	BC211/BCE311	Same as BF29905A, but additional with roller guide (front) for controlled feeding of labels at front side of bags.
BF29905ATR	BC211/BCE311	Same as BF29905A, but additional with roller guide (rear) for controlled feeding of labels at rear side of bags.
BFB29910A	BC211UA/BCE311UA 80800UA	<b>Combined bag feed-in, trimming and taping device <u>with belt drive</u> and crepe tape folder (V-type (V), long bag in-feed).</b> Width of tape not adjustable. Folder available for 50, 55 and 60mm wide tapes. Please specify. Standard 60mm. Speed 11-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped before sewing. Performance test of bag material recommended.
BFB29915A	BC211/BCE311 80800	<b>Combined bag feed-in, trimming and fold-over device <u>with belt drive</u> (V-type (V), long bag in-feed).</b> Speed 11-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 50 mm), folded over to the rear by approx. 30-40 mm and fed into the sewing machine. Performance test of bag material recommended.
BFB29920A	BCE311KA 80800TA	<b>Combined bag feed-in and trimming device <u>with belt drive</u> (V-type (V), long bag in-feed).</b> Speed 9-16 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped after sewing. Performance test of bag material recommended.
BFBS29920A	BCE311KA 80800TA	Same as BFB29920A, but <b>parallel(II)</b> , long bag in-feed.

Subject to change without notice © Union Special GmbH

Union Special LLC  
One Union Special Plaza  
Huntley, IL 60142, USA  
Phone: 847/669 4500,  
Fax: 847/669 4239  
www.unionspecial.com



Union Special GmbH 03-21\_en  
Raiffeisenstraße 3  
71696 Möglingen, Germany  
Tel.: +49 (0)7141/247-0,  
Fax: +49 (0)7141/247-100  
www.union-special.com