

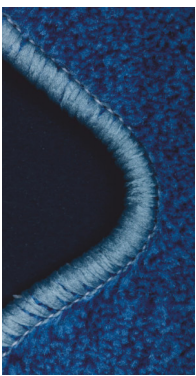
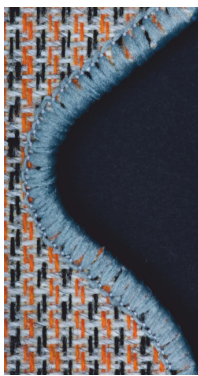




Union Special
INDUSTRIAL SEWING EQUIPMENT

81200







HEAVY DUTY CARPET SERGING MACHINES FOR CARPETS AND RUGS



			
81200CZ122 for sewing inside and outside curves		81200AC for decorative overseaming on carpets with tape binding	

The 81200's Robust construction and Rugged reliability, combined with the ease of operation, will provide years of smooth long lasting service. Machines are available in two and three thread versions to serge a variety of styles and types of carpets, rugs and mats.

- FEATURES:**
- **COVERAGE** - 8 to 10mm wide seams
 - **CAPACITY** - up to 12mm
 - **Complete wrap with two thread and edge wrap with three thread machines**
 - **Smooth operation and long life**
 - **No-slip feeding**

Machine Style	Application	Seam Specification/ Seam width	Stitch length	Sewing capacity
81200C Single needle, three thread carpet overedging machine, Plain feed	For decorative overseaming on carpets and rugs without rubber backing or rubber foam backing. Thread is drawn to the edge of material.	505EFd-1  Seam width 8 - 10mm	8 to 16SPI (3.2 - 1.6mm)	Up to 1/2" (12mm)
81200AC Single needle, three thread carpet overedging machine, Top and bottom feed, with Tape Binding	For decorative overseaming on carpets and rugs with rubber backing or rubber foam backing. With top and bottom feed, material is fed uniformly, without stitch shortening or perforating backing. The binding tape is put around the carpet edge by a tape binder folder and covered by the over-edge seam. Width of binding tape 19/32" /15mm) Depending on carpet material, overedging without binding is possible. Thread is drawn to the edge of the material.	505EFd-1  Seam width 8 - 10mm	4 to 9SPI (6 - 2.5mm)	Up to 1/2" (12mm)
81200AF Single needle, two thread carpet overedging machine, Top and bottom feed, with Tape Binding	For decorative overseaming on carpets and rugs with rubber backing or rubber foam backing. With top and bottom feed, material is fed uniformly, without stitch shortening or perforating backing. The binding tape is put around the carpet edge by a tape binder folder and covered by the over-edge seam. Width of binding tape 19/32" /15mm) Depending on carpet material, overedging without binding is possible. Thread is drawn around the edge of the material.	502EFd-1  Seam width 8 - 10mm	4 to 9SPI (6 - 2.5mm)	Up to 1/2" (12mm)
81200AG Single needle, two thread carpet overedging machine Plain feed, with Tape Binding	For decorative overseaming on carpets and rugs without rubber backing or rubber foam backing. The binding tape is put around the carpet edge by a tape binder folder and covered by the over-edge seam. Width of binding tape 19/32" /15mm) Thread is drawn around the edge of material.	502EFd-1  Seam width 8 - 10mm	4 to 9SPI (6 - 2.5mm)	Up to 1/4" (6.4mm)
81200CZ122 Single needle, two thread carpet overedging machine, Plain feed	For decorative overseaming on carpets and mats with inside and outside curves. Thread is drawn around the edge of material.	502EFd-1  Seam width 8 - 10mm	8 to 16SPI (3.2 - 1.6mm)	Up to 1/2" (12mm)
81200CZ124 Single needle, three thread carpet overedging machine, Plain feed	For decorative overseaming on carpets and mats with inside and outside curves. Thread is drawn to the edge of material.	505EFd-1  Seam width 8 - 10mm	8 to 16SPI (3.2 - 1.6mm)	Up to 1/2" (12mm)

Subject to change without notice © Union Special GmbH

