

„POWERSTITCHER“

**High performance two needle top feed sewing machine with
stepper puller for extremely heavy geotextiles**

Prototype



**BM313CD2TEN
with
Pedestal
PN389A862**

Features:

- **High seam strength**
- **Positive feeding through top feed and additional stepper puller attached**
- **High sewing capacity**
- **Easy handling**
- **High sewing speed**
- **Low maintenance**
- **Low wear and tear**

BM313CD2TEN:

High performance two needle four thread double locked stitch machine with top feed and stepper puller attached for fast, consistent sewing of all types of heavy geotextiles.


High puncture force due to geared belt drive.

Electro-pneumatically operated presser foot and upper feed dog lifter.

Pneumatic presser foot spring.

Technical data:

- Feed: Stepper puller
- Stitch range: 8 to 10mm
- Standard setting: 9mm
- Puller capacity: 16mm
- Sewing capacity: 20mm
- Needle: 9848GF
- Maximum speed: up to 1800 stitches / min. (depending on sewing operation)
- Seam specification: (401.401) SSa-2
- Needle distance: 7.2 mm (staggered, right needle front)

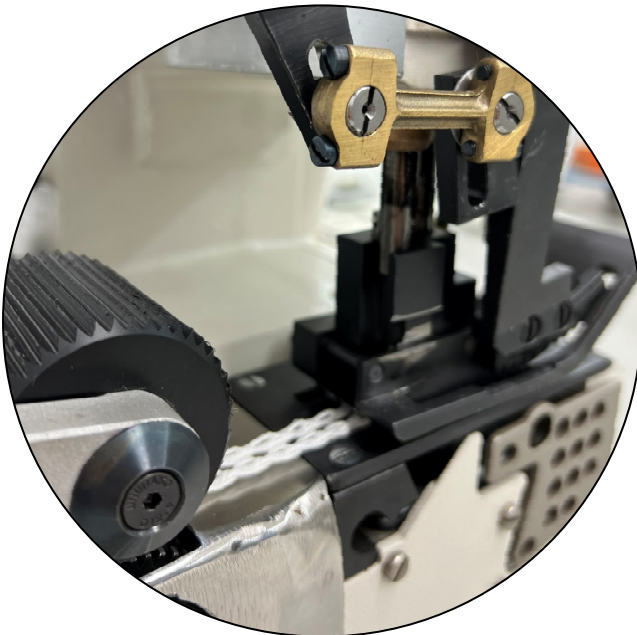

Subject to change without notice © Union Special GmbH

