


**„POWERSTITCHER“**

High performance two needle top feed sewing machine  
for extremely heavy geotextiles

**Prototype**

Additional  
stepper puller  
attached

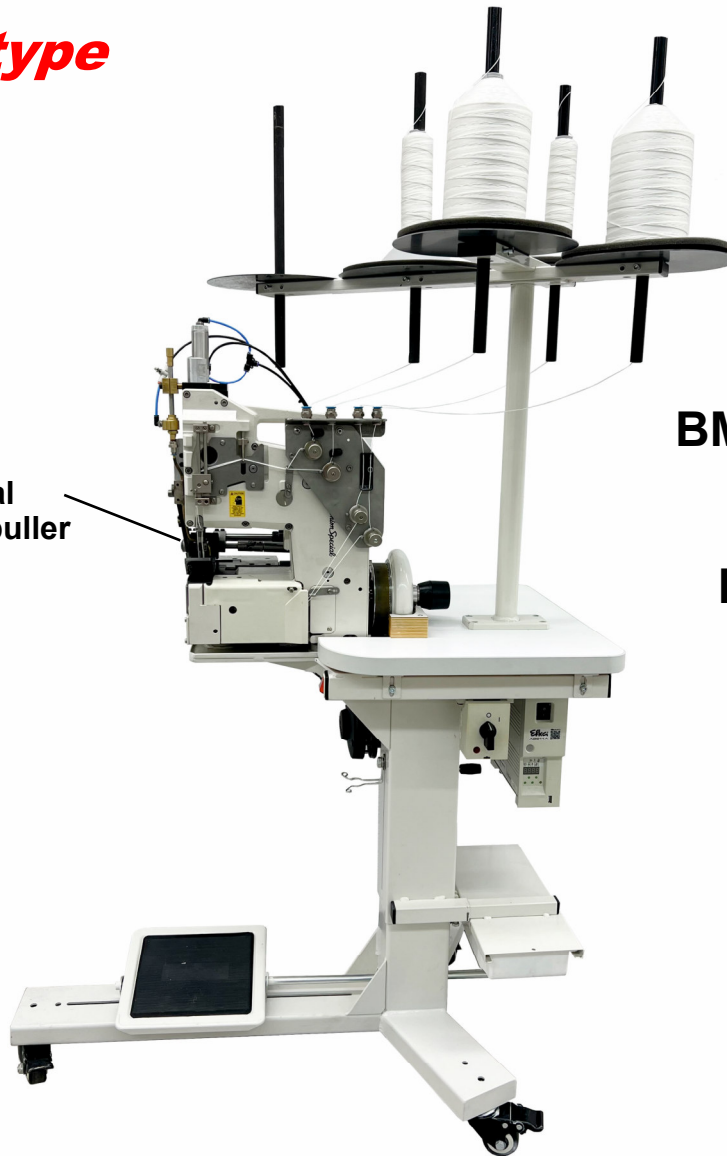

**BM313CD2TEN  
with  
Pedestal  
PN389A862**

**Features:**

- High seam strength
- Positive feeding through top feed  
(Optional, additional stepper puller attached)
- High sewing capacity
- Easy handling
- High sewing speed
- Low maintenance
- Low wear and tear

## BM313CD2TEN:

High performance two needle four thread double locked stitch machine with top feed for fast, consistent sewing of all types of heavy geotextiles.



**High puncture force due to geared belt drive.**

Electro-pneumatically operated presser foot and upper feed dog lifter.

Pneumatic presser foot spring.

### Technical data:

- Stitch range: 8 to 10mm
- Standard setting: 9mm
- Sewing capacity: 20mm
- Needle: 9848GF
- Maximum speed: up to 1800 stitches / min. (depending on sewing operation)
- Seam specification: (401.401) SSa-2
- Needle distance: 7.2 mm (staggered, right needle front)
- Optional:
  - Feed: Stepper puller
  - Puller capacity: 16mm

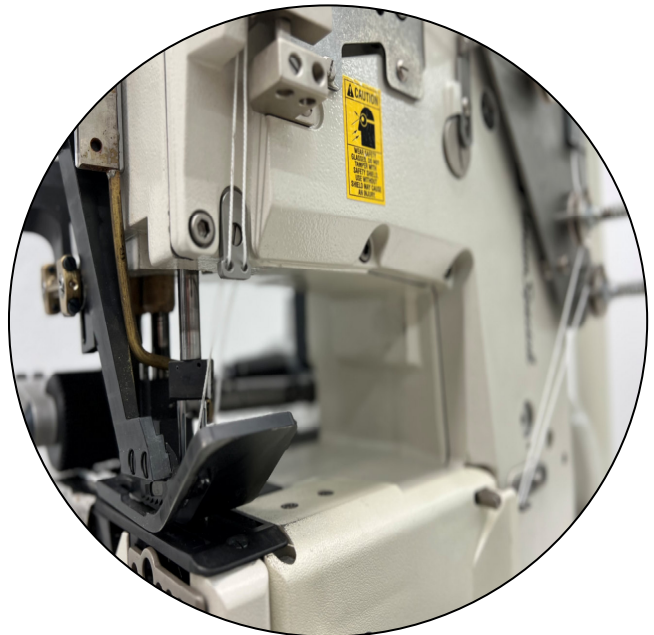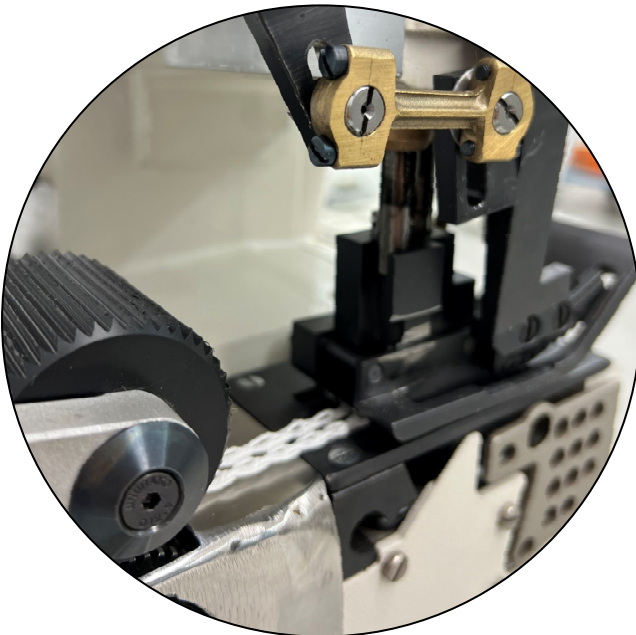

Subject to change without notice © Union Special GmbH

