


Introducing the better choice . . .



Chain Drive

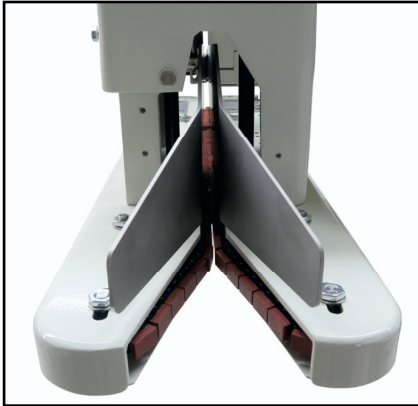

. . . in bag closing

Bag Feed-in Devices for the high speed and high performance bag closing machines **Series BC200, BCE300 and 80800**

G(S)49900, GB(S)49900, VN-G(S)49900, VN-GB(S)49900
Gear motor, Voltage for motor: 400 V, 50 Hz, 3 phase

Common Specification:

All external parts are rust protected (on VN-G(S)49900, VN-GB(S)49900 additionally ball bearing and roller chain are made of stainless steel)

Rubber coated conveying chains to protect the bag material.

Degree of protection: IP 55. Insulation class: F.

Painting: RAL 9002, powder coated.

Delivery includes pre-feeler switch 29926A to start the sewing machine.

Other voltages and frequencies on request.

Optional: Frequency control assm. 29926FU-OPTI-0.37

Stepless adjustment of the conveyor belt speed from 9-25 m/min.

● **STURDY**

● **RELIABLE**

● **EFFICIENT**

Part No.	for Machine Styles	Description
GB49905G VN-GB49905G	BC211/BCE311 BC291/BCE391 80800	Bag feed-in device (V-type (V), long bag in-feed) The spread paper, HDPE-foil or woven PP bag is fed into the sewing machine. Speed 9-23 m/min. at 50 Hz. Depending on the length and filling height of the bag the seam can be adjusted to a depth of up to 120 mm from top of the bag. Standard setting 30-40 mm. <u>VN = rust protected</u>
GBS49905G VN-GBS49905G	BC211/BCE311 BC291/BCE391 80800	Same as GB49905G, but parallel (II), long bag in-feed . <u>VN = rust protected</u>
93051R		Bag-top fold-over device to fold the bag top to the rear. Assembling to the bag feed-in devices GB49905G and G49905G required. For all kinds of self-supporting bags. Performance test of bag material recommended.
G49905G VN-G49905G	BC211/BCE311 BC291/BCE391 80800	Same as GB49905G, V-type (V) , but short version. <u>VN = rust protected</u>
GS49905G VN-GS49905G	BC211/BCE311 BC291/BCE391 80800	Same as GBS49905G, parallel (II) , but short version. <u>VN = rust protected</u>
GB49910G VN-GB49910G	BC211UA/BCE311UA	Combined bag feed-in, trimming and taping device with crepe tape folder (V-type (V), long bag in-feed). Width of tape not adjustable. Folder available for 50, 55 and 60mm wide tapes. Please specify. Standard 60mm. Speed 9-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped before sewing. Performance test of bag material recommended. <u>VN = rust protected</u>
GBS49910G	BC211UA/BCE311UA	Same as GB49910G, but parallel (II), long bag in-feed .
G49910G	BC211UA/BCE311UA	Same as GB49910G V-type (V) , but short version.
GS49910G	BC211UA/BCE311UA	Same as GBS49910G parallel (II) , but short version.
GB49915G	BC211/BCE311 BC291/BCE391 80800	Combined bag feed-in, trimming and fold-over device (V-type (V), long bag in-feed) . Speed 9-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 50 mm), folded over to the rear by approx. 30-40 mm and fed into the sewing machine. Performance test of bag material recommended.
GBS49915G	BC211/BCE311 BC291/BCE391 80800	Same as GB49915G, but parallel (II), long bag in-feed .
GB49920G VN-GB49920G	BC211KA	Combined bag feed-in and trimming device (V-type (V), long bag in-feed) . Speed 9-16 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped after sewing. Performance test of bag material recommended. <u>VN = rust protected</u>

Subject to change without notice © Union Special GmbH

Union Special LLC
One Union Special Plaza
Huntley, IL 60142, USA
Phone: 847/669 4500,
Fax: 847/669 4239
www.unionspecial.com



Union Special GmbH 04-25_en
Raiffeisenstraße 3
71696 Möglingen, Germany
Tel.: +49 (0)7141/247-0,
Fax: +49 (0)7141/247-100
www.union-special.com