



**NEW GENERATION**

**“ECONOMY“ TOP FEED BAG CLOSING MACHINE**

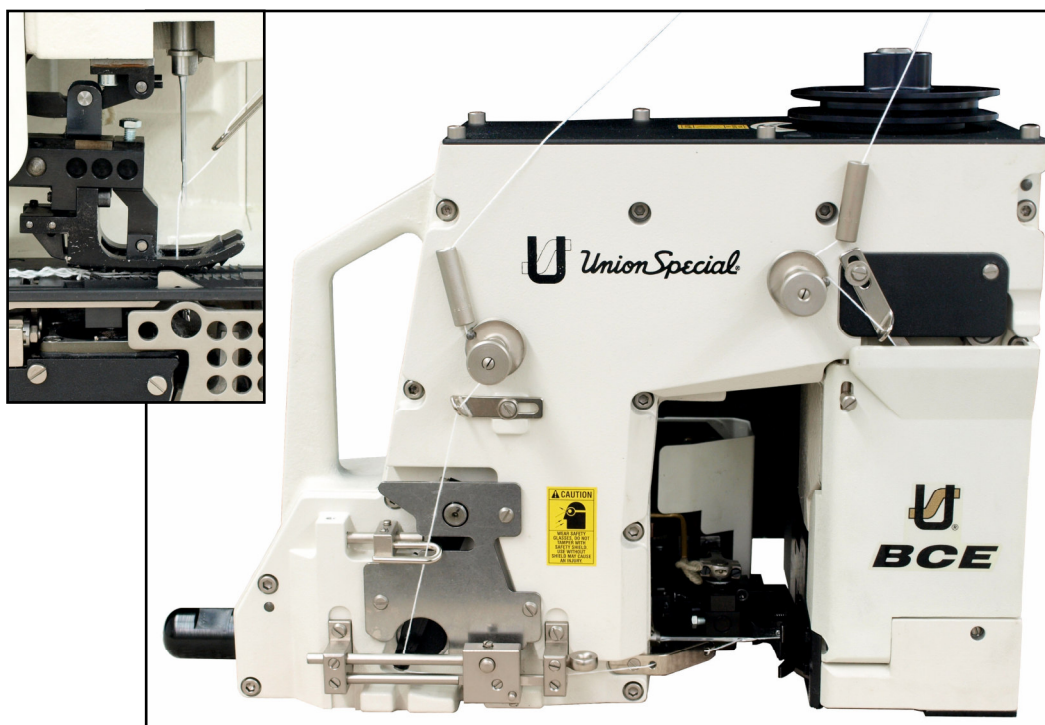

Plain closure



Fold-over closure manually by operator or by additional bag feed-in device with bag-top fold-over device

**BCE313P16-1M:**

**“ECONOMY“ TOP FEED SINGLE NEEDLE TWO THREAD DOUBLE LOCKED CHAINSTITCH BAG CLOSING MACHINE** in automatic version for unproblematically closing filled bags. The combined top and bottom feed grips both sides of the bag like pincers. The thread chain is trimmed automatically by electro-pneumatically operated jump out scissors. Internal forced lubrication. Shell design casting. Low noise and vibration.

Start-stop:	automatically by feeler controlled proximity switch
Voltage:	24 V DC
Operating pressure:	3-4 bar
Maximum speed:	up to 2000 RPM, depending on stitch length, operation and material
Stitch type:	401
Capacity under presser foot:	up to 12,7 mm
Stitch length:	8, 9 and 10 mm, standard setting 9 mm
Sewing capacity on paper bags:	up to 24 plies, depending on weight of paper

● EFFICIENT

● RELIABLE

● STURDY

Subject to change without notice © Union Special GmbH

Union Special LLC  
 One Union Special Plaza  
 Huntley, IL 60142, USA  
 Phone: 847/669 4500,  
 Fax: 847/669 4239  
 unionspecial.com



Union Special GmbH 08-22\_en  
 Raiffeisenstraße 3  
 71696 Möglingen / Germany  
 Tel.: +49 (0)7141/247-0,  
 Fax: +49 (0)7141/247-100  
 www.union-special.com