


„LONGARM POWERSTITCHER“

High performance longarm single needle bag making machine

NEW

*extremely large under-arm space,
high puncture force through geared belt drive*

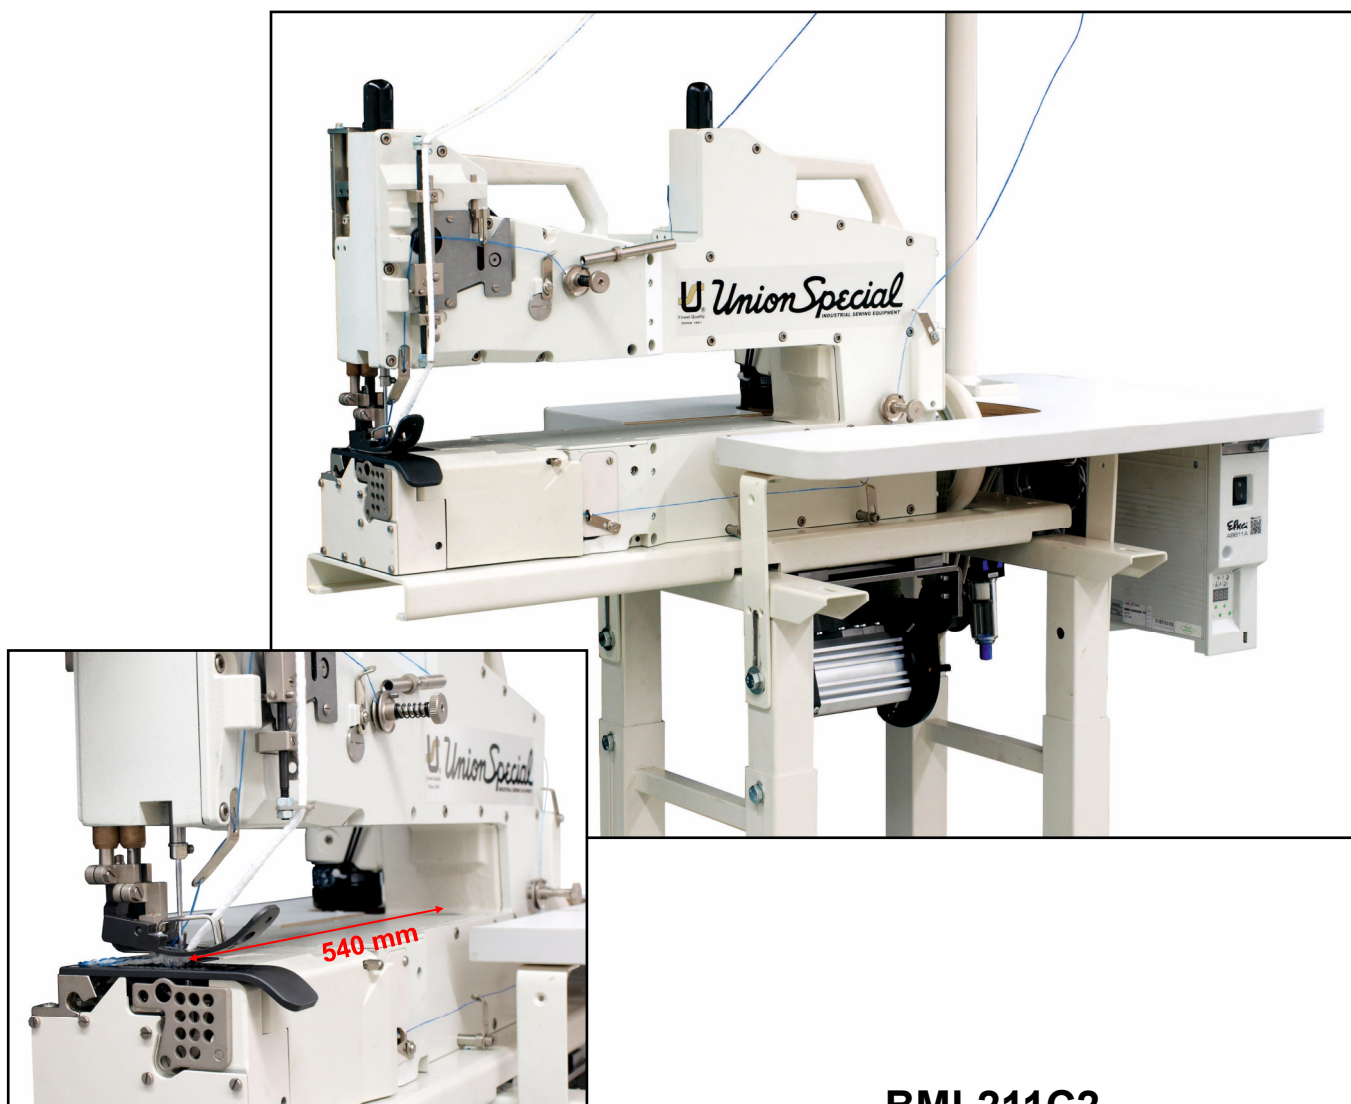

**BML211C2
with Pedestal PN387A862**

- STURDY
- EFFICIENT
- RELIABLE
- FAST

„LONGARM POWERSTITCHER“

High performance longarm single needle sewing machine with geared belt drive



STITCH RANGE:	6.5 to 10 mm
STANDARD SETTING:	9 mm
SEWING CAPACITY:	up to 15 mm
UNDER-ARM SPACE:	540 mm
STANDARD NEEDLE:	9848GF300/120
MAXIMUM SPEED:	up to 2000 stitches / min. (depending on sewing operation)
SEAM SPECIFICATION:	401 SSa-1
THREADS:	2000-4000 Denier, Polypropylene thread

Machine Style	Description	Application	Required Installation
BML211C2	Single needle double locked stitch longarm bag making machine with rust protected external parts. With plain feed. <u>- Extremely large under-arm space</u> <u>- High puncture force through geared belt drive.</u> Electro-pneumatically operated presser foot lifter. Pneumatic presser foot spring. With guides for filler cord from the top for sealing the needle punctures. Internal forced lubrication. Shell design casting. Low noise and vibration.	For sewing bags and similar items. Especially for sewing Q-bags made of polypropylene fabric. Crossing heavy seams is not possible. Stops adjustable in needle up or down position with simultaneously lifting the presser foot .	PN387A862 Pedestal for free arm installation of the sewing machine with geared belt drive and clutchless electronic drive.
			PN388A862 Pedestal <u>motor driven</u> <u>high adjustable</u> for free arm installation of the sewing machine with geared belt drive and clutchless electronic drive.

For many years UNION SPECIAL is well known for producing sturdy and long lasting sewing machines for the production of Big Bags (FIBCs). As a leading partner for the CONTAINER BAG manufacturers it is our obligation to serve you with the finest in quality and performance.

With the machine styles **BML211C2** we offer you top products based on our long experience.

- | | | |
|-------------------------------|---------------------------------|----------------------------|
| ● High Seam Strength | ● Positive Feeding | ● Low Maintenance |
| ● High Sewing Capacity | ● Low Thread Consumption | ● Low Wear and Tear |
| ● High Sewing Speed | ● Easy Handling | |

Subject to change without notice © Union Special GmbH

Union Special LLC
 One Union Special Plaza
 Huntley, IL 60142, USA
 Phone: 847/669 4500,
 Fax: 847/669 4239
 www.unionspecial.com



Union Special GmbH 04-21_en
 Raiffeisenstraße 3
 D-71696 Möglingen, Germany
 Tel.: +49 (0)7141/247-0,
 Fax: +49 (0)7141/247-100
 www.union-special.com